
# Rack and pinion actuator EA-SZ 230/65/550



## Technical Data

| | |
|---|---|
| Input voltage | 230 V AC |
| Nominal current | 0.22 |
| Running speed | 9 |
| IP code | IP55 |
| Switch on duration | 20 |

## MOUNTING POSITIONS

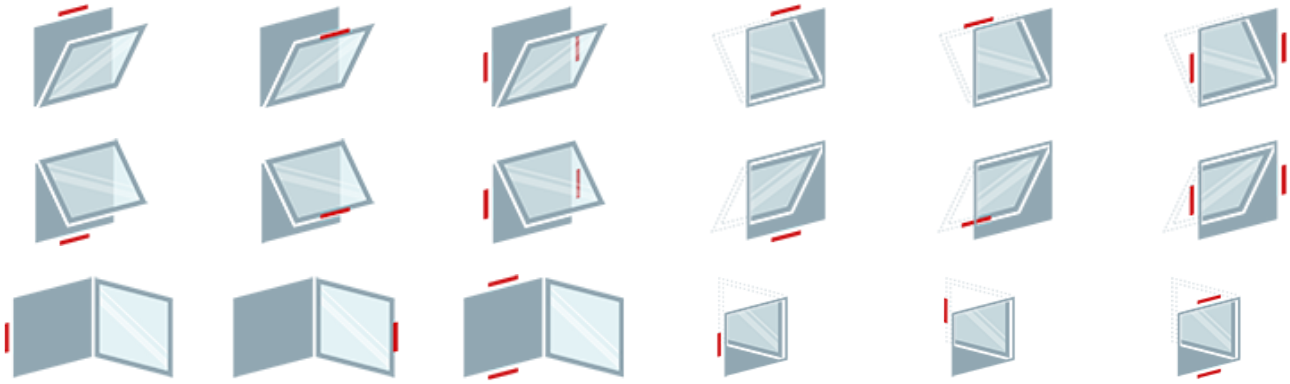

## TECHNICAL DATA

| | |
|---|---|
| Matchcode | EA-SZ 230/65/550 |
| Article name | Rack and pinion actuator EA-SZ 230/65/550 |
| Part number | M2 1081 A |
| Input voltage | 230 V AC |
| Nominal current | 0.22 |
| Stroke | 550 |
| Push force | 650 |
| Pull force | 650 |
| Cut-Off | integrated overload cut-off |
| Running speed | 9 |
| IP code | IP55 |
| Switch on duration | 20 |
| Mounting way | aufgesetzt |
| Weight | 2.95 |
| Housing | Rack housing: anodized aluminum E6 / EV1, gray<br>motor housing: plastic, stroke + 220 mm x 54 x 120 mm |
| Housing type | Aluminium |
| Colour | On request |
| Housing length | 220 |
| Housing width | 54 |
| Housing height | 120 |
| Connection cable | Silicone cable 4 x 0.75 mm², white, Length 1,500 mm |

# Rack and pinion actuator EA-SZ 230/65/550

| | |
|---|---|
| Nominal working temperature | 20 |
| Environment temperature range | -10 °C - 60 °C |
| Brackets included | ja |

## ACCESSORIES

| Part no. | Matchcode | |
|---|---|---|
| M2 1083 | EA-SZ-M-350 | |
| M2 1083 A | EA-SZ-VERBIND-1 | |
| M2 1083 B | EA-SZ-VERBIND-2 | |
| M2 1084 | EA-SZ-M-550 | |
| M2 1089 | EA-SZ-M-750 | |
| M2 1091 | EA-SZ-M-1000 | |