
Fire Curtain FIRESCREEN-345-SFS-EW

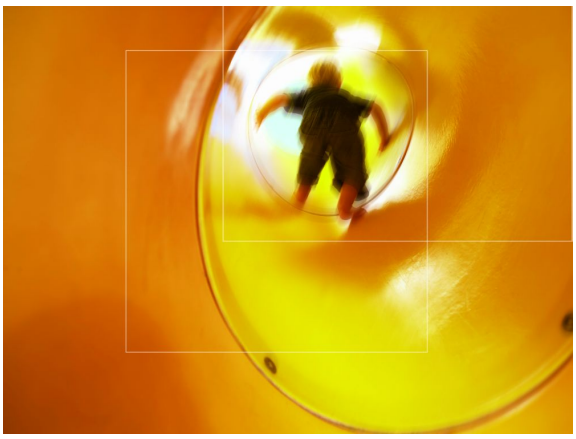

Technical Data

TECHNICAL DATA

Matchcode	FIRESCREEN-345-SFS-EW
Article name	Fire Curtain FIRESCREEN-345-SFS-EW
Part number	FSV 54102
Classification	E120 EW90 C2 according EN 13501-2 CE according EN 16034
Fabric	Polyurethane coated Fabric, 8 mm thick
Unwind	Through Gravity (gravity fail safe)
Rewind	Through integrated tube motor 230 V AC - end limits can be adjusted
System installation	Ceiling or wall mounting with appropriate and verified material
System size	max. 8250 x 6000 mm (WxH)
Housing	Headbox: 345 x 345 mm (WxH); Side guides: 120 x 65 mm; Galvanized sheet steel
Bottom Bar	Round bar as weight inside of the fabric
Housing type	Steel case

ACCESSORIES

Part no.	Matchcode	
A3 2054	RM 2860 FSV	
A3 2167	HE-088-YELLOW-ALU	
A3 2168	HE-088-ORANGE-ALU	
ST4 3604	PROtec-RZ-24-230	
ST4 3605	PROtec-RZ-24-230-SB	
ST4 3608	PROtec-RZ-24-230-SB-NA	