# Chain actuator PA-K-65/1200-S-DA



## Technical Data

| | |
|---|---|
| Input voltage | 24 V DC |
| Nominal current | 1.9 |
| Running speed | 11 |
| IP code | IP32 |
| Switch on duration | 30 |

## MOUNTING POSITIONS

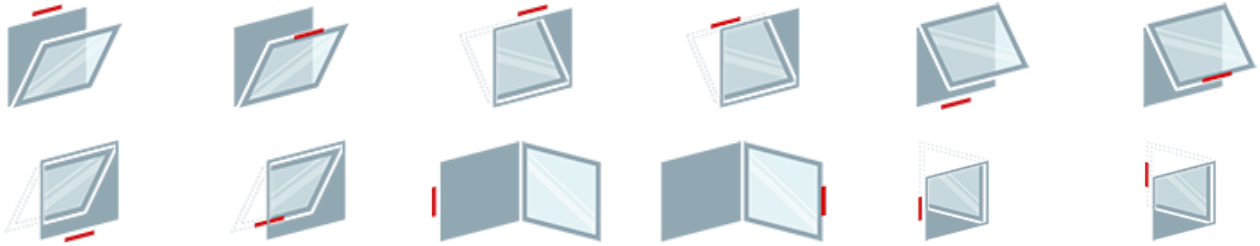

## TECHNICAL DATA

| | |
|---|---|
| Matchcode | PA-K-65/1200-S-DA |
| Article name | Chain actuator PA-K-65/1200-S-DA |
| Part number | M2 2245 S DA |
| Input voltage | 24 V DC |
| Nominal current | 1.9 |
| Input voltage range | - 15 % / + 15 % |
| Networked standby | 0.9 W (1 min) |
| Stroke | 1200 |
| Push force | 650 |
| Pull force | 650 |
| Nominal locking force | < 3000 N |
| Cut-Off | Integrated electronic overload cut-off |
| Running speed | 11 |
| IP code | IP32 |
| Switch on duration | 30 |
| Mounting way | aufgesetzt |
| Weight | 3.1 |
| Housing | Aluminium profile housing EV1 anodized |
| Housing type | Aluminium |
| Colour | On request |
| Housing length | 927 |
| Housing width | 50 |
| Housing height | 41 |
| Appliance class | III |
| Connection cable | SICO PLUG connection. Excluding connection cable / set. |
| Nominal working temperature | 20 |
| Environment temperature range | -5 °C - 75 °C |

# Chain actuator PA-K-65/1200-S-DA

| | |
|---|---|
| Brackets included | nein |
| Customs tariff no | 84798997 |
| Packaging part no. | N-99-124 |

## ACCESSORIES

| Part no. | Matchcode |
|---|---|
| K2 5088 | K-K50-SKI |
| K2 5089 | K-K50-OK |
| K2 5090 | K-K50-AKI |
| K2 5092 | K-K50-A |
| K2 5093 | K-K50-K |
| K2 5094 | K-K50-FLEX |
| K2 5106 | K-K-OK-SK |
| SD1 8513 | SICO-LINK-USB-110 |
| SD1 8522 | SICO-LINK-Adapter |
| SD1 8525 | SICO-PLUCKER |