

Chain actuator EA230-K-50/800-S

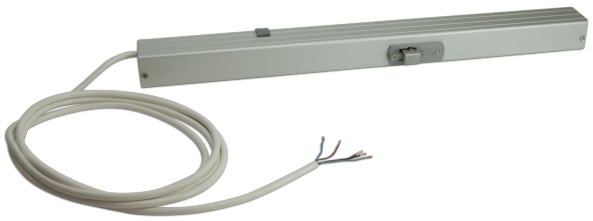

Technical Data

Input voltage	230 V AC
Nominal current	0.15
Running speed	8
IP code	IP32
Switch on duration	30

MOUNTING POSITIONS

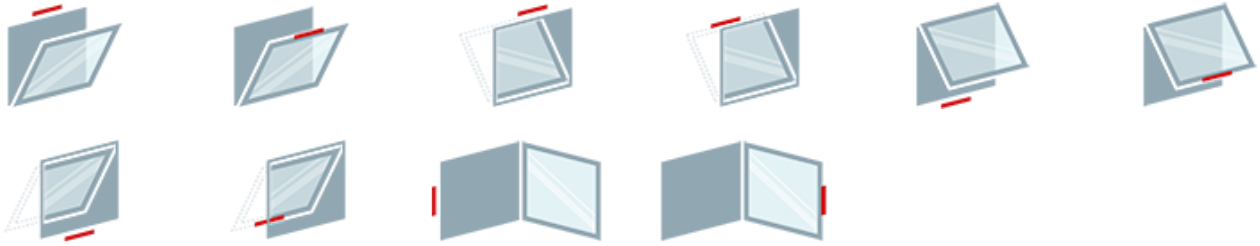

TECHNICAL DATA

Matchcode	EA230-K-50/800-S
Article name	Chain actuator EA230-K-50/800-S
Part number	M2 5162 S
Input voltage	230 V AC
Nominal current	0.15
Input voltage range	- 10 % / + 10 %
Stroke	800
Push force	500
Pull force	500
Nominal locking force	700
Cut-Off	integrated electronic load cut-off
Running speed	8
IP code	IP32
Switch on duration	30
Mounting way	aufgesetzt
Weight	2.5
Housing	Aluminium profile housing E6/EV1 anodized
Housing type	Aluminium
Colour	On request
Housing length	840
Housing width	50
Housing height	41
Appliance class	II
Connection cable	Silicone connection cable 5 x 0.75 mm² (length 3,000 mm)
Nominal working temperature	20
Environment temperature range	-5 °C - 75 °C
Brackets included	nein
Packaging part no.	N-99-124

Chain actuator EA230-K-50/800-S

ACCESSORIES		
Part no.	Matchcode	
K2 5088	K-K50-SKI	
K2 5089	K-K50-OK	
K2 5090	K-K50-AKI	
K2 5092	K-K50-A	
K2 5093	K-K50-K	
K2 5094	K-K50-FLEX	
K2 5106	K-K-OK-SK	